


# Air Curtains

by Frico

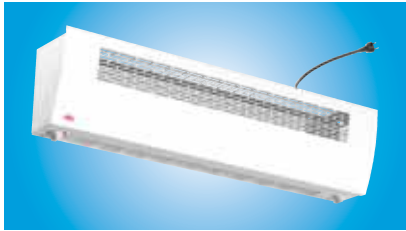



## AD 100, for small openings

- Designed primarily for smaller openings such as kiosk and service windows, where a narrow hot air stream is required.

✎ With electric heating 2-3 kW, with cord and cable

✎ With electric heating 4,5 kW, for permanent installation

length: 0,8 m.

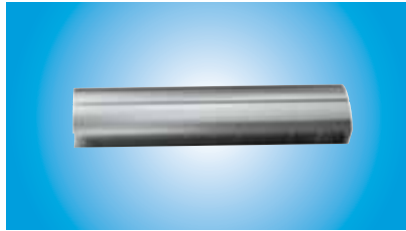



## AD Corinte, for door heights up to 3 m

- A flexible series that can be mounted either horizontally or vertically in entrances.
- Standard design in brushed or in polished stainless steel.

✎ with electric heating 12-20 kW,  
 ◆ with water heating

length: 1, 7, 2,2 and 2,7 m.

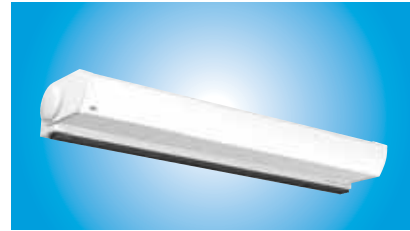

## AD 200, for door heights up to 2,5 m

- Excellent for use in customer entrances where doors are frequently opened; shops, restaurants, supermarkets etc.

- An adjustable air outlet grille makes it possible to direct the air for an optimal air curtain effect.

- Adjustable distance between mounting brackets.



▲ ambient

✎ with electric heating 3-4,5 kW, with cord and cable (AD210C03) and cable (AD210C05)

✎ with electric heating 6-18 kW, for permanent installation

◆ with water heating

length: 1, 1,5 and 2 m.

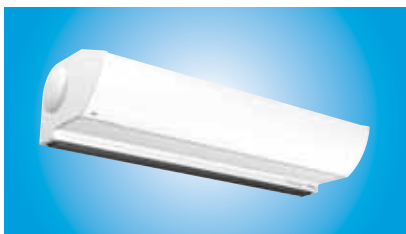

## AD 400, for door heights 3-4,5 m


- Excellent for use in industrial doorways, such as loading bays.
- Combines high performance with a compact size and an elegant design.
- An adjustable air outlet grille makes it possible to direct the air for an optimal air curtain effect.
- Adjustable distance between mounting brackets.

▲ ambient

✎ with electric heating 13,5 - 27 kW

◆ with water heating

length: 1,5 and 2 mm.




## AD 500, for door heights 3-6 m

- Designed for heavy duty applications with high demands on air flow performance.
- Effectively prevents energy losses through open doorways. the leakage of heated and refrigerated air is minimized, giving energy savings and a comfortable indoor climate.
- The air stream can be directed to suit a specific doorway.

▲ ambient

length: 1 and 1,5 m.



## Controls

Frico offer a complete range of control equipment to suit your requirements:

- 5-step speed control
- Thermostats
- Door contacts
- BMS systems